



TOUCHPAD DEADBOLT LOCK

PI3S



Smart Lock Options for the Perfect Smart Home

- With fingerprint access technology allows you to simply use your unique fingerprint to lock and unlock your door.
- With Card access system, ease of use and maintenance are key factors to consider, and meets your organization's security needs and provides peace of mind for everyone.




Benefits of PI3S with membrane touchpad

- **Fingerprint Resistant**
The PI3S features a membrane switch to prevent code detection from fingerprints on the touchpad.
- **Extreme Temperature Safety**
Membrane switches can be able to withstand harsh temperatures.
- **Glove-Friendly Touchpad**
Membrane switches are the best user interface display option for those working in environments that require gloves because the touchpad can be embossed.
- **Easy to Clean & Maintain**
Membrane switches are resistant to water and other liquids and easy to clean.

PRODUCT SPECIFICATIONS

Access Methods (2 versions provided)	FP version: Fingerprint / PIN code / Key Card version: Card / NFC / PIN code / Key	Card Frequency	Mifare 13.56MHz
Lock Body Trim Material	Zinc Alloy.	LED Backlit	Automatic wake up the backlight.
Product Size	Exterior: 148mm(L) x 68mm(W) x 25mm(H). Interior: 132mm(L) x 71mm(W) x 39mm(H).	Auto-Locking Function	1-99 seconds
Token	Master PIN code: 1 User PIN code: up to 70 One-time PIN code: up to 5 Fingerprint: up to 99 User card: up to 99	Touchpad Security Protection	Automatic lockdown if wrong code enters consecutive over 5 times.
Fingerprint Sensor	Biometric Semi-Conductor (Swedish FPC fingerprint sensor).	Vacation Mode	Disable all electronic functions temporary.
PIN Code Length	4-10 digits in length.	Backset	Adjustable 60mm or 70mm.
		Door Thickness Range	35 - 45mm.
		Door Prep.	Ø 54mm for cross bore; Ø 25.4mm for edge bore.
		Cylinder	5 pins, Kwikset keyway standard (re-key available).
		Power Supply	DC6V, four AA (1.5V) alkaline batteries.
		Temperature (Battery excluded)	Exterior: -20 °C to 60 °C Interior: 0 °C to 60 °C
		Humidity (Battery excluded)	30% - 80%.

DIMENSIONS

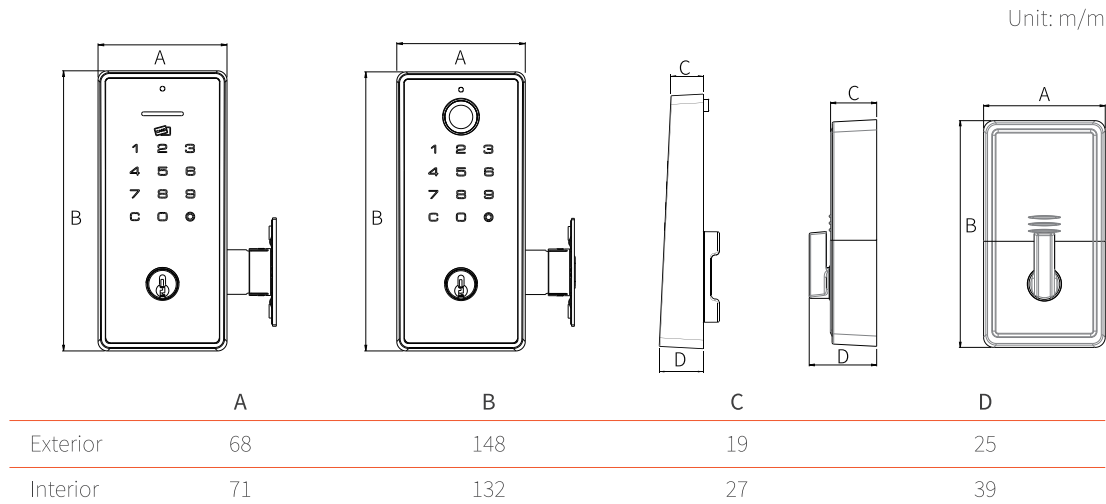

INNOVATIVE SECURITY

- ANSI/BHMA Grade 2 certified.
- Comply to 20 min UL fire rated.
- Advanced Fingerprint Unlock: With Sweden FPC fingerprint module, offers fast and safety unlock.
- Deadbolt detection: Touchpad deadbolt with auto latch bolt locking detection prevents any incomplete door locking.
- Vacation mode available: when you leave to temporarily deactivates all electronic functions or entry using key only.

EASY INSTALLATION

- Replaces existing door hardware with just a screwdriver.
- No hard wiring needed.
- Operates on 4 AA batteries that will last for approximately 1 year.

FINISHES



Satin Nickel **15**



Satin Chrome **26D**



Matte Black **514**

TONG LUNG METAL INDUSTRY CO., LTD

service@ezset.com.tw

Head Office & Factory

No.82, Zhonghua Rd., Minxiong Industrial Park,
Chiayi County 62157, Taiwan
T / + 886-5-2918-168

Taipei Office

14F., No.44, Sec.2, Zhongshan N. Rd., Taipei City 10448, Taiwan
T / + 886-2-2568-2568

